


DRY ICE TRANSPORTATION AND STORAGE



OLIVO OFFERS 2 RANGES OF INSULATED CONTAINERS

Containers made of fibreglass CLASSIC

Body and lid are moulded in Fibreglass/polyester and coated with white gelcoat. Classic conception and quality of raw materials ensure a high reliability to this range of containers. A range of optional equipment allows you to customize your container. For example, the large capacity models can be fitted with an outer skin of galvanized steel to give protection from possible damage from shocks caused by rough handlings.



BAC 50	BAC 120	BAC 150	BAC 250	BAC 260	BAC 480	BAC 600
35 Kg *	90 Kg *	110 Kg *	200 Kg *	200 Kg *	380 Kg *	480 Kg *

Containers made of polyethylene MONOBLOC

Body and lid are made of one piece (monobloc) rotomoulded polyethylene. Manufactured using the latest rotomoulding technology, these « ready to use » containers have no optional equipment and are fitted with a silicone seal as standard. Their dimensions are in accordance with standard European transport sizes. The standard range is produced in turquoise blue colour RAL# 6024.



BAC 55	BAC 75	BAC 160	BAC 420
40 Kg *	60 Kg *	120 Kg *	330 Kg *

The Olivo containers INSULATION

The insulation is polyurethane foam (cfc and hcf free) produced by in-situ injection. To ensure conformance to our high standards, the insulation efficiency (K value) is tested by official and independent laboratories.

* weight of Dry Ice calculated on the base of pellets with a density of 0,8

MONOBLOC




Bac made of polyethylene



Model	BAC 55	BAC 75	BAC 160	BAC 420
Outer dimensions in mm	996 X 926 X 810	1200 X 1000 X 970	1200 X 1200 X 970	1200 X 1200 X 970
Inner dimensions in mm	800 X 720 X 455	1000 X 800 X 600	1000 X 1000 X 600	1000 X 1000 X 600
Useful volume	262 litres	480 litres	600 litres	600 litres
K value W/M2x°C	0,31	0,27	0,25	0,25
Weight in Kg	73 Kg	112 Kg	122 Kg	122 Kg
Weight of Dry Ice	200 Kg	380 Kg	480 Kg	480 Kg

Specifications and optional equipment

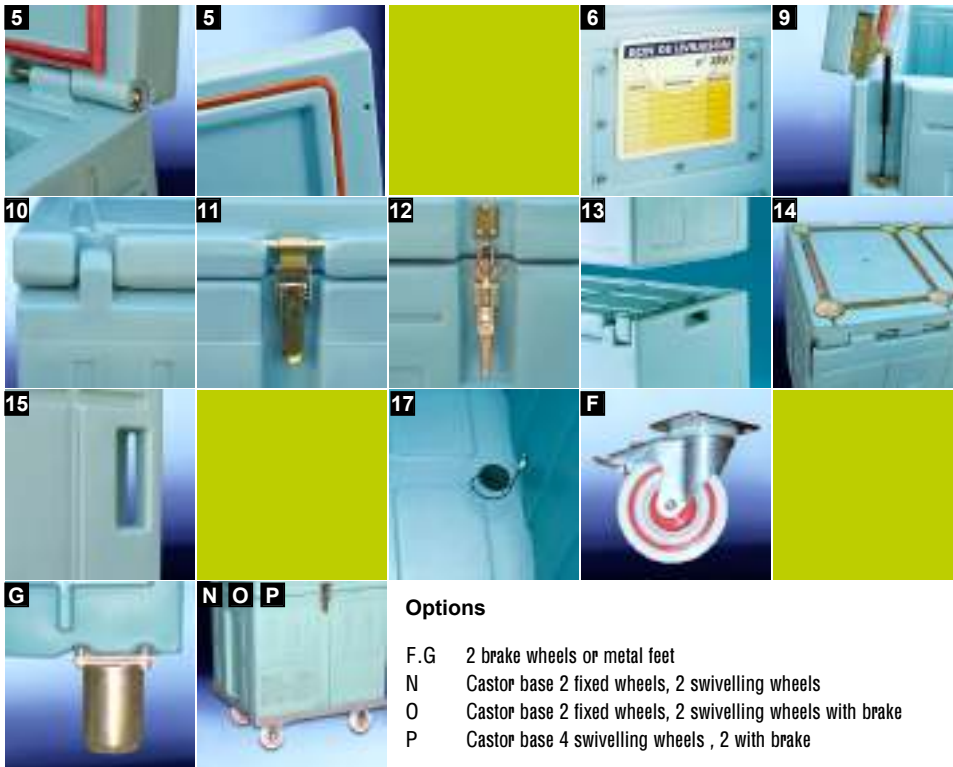

Technical features

- 5 Silicone monobloc seal
- 6 Recessed label holder
- 9 Lid fitted with gas jacks for a 85 ° opening (BAC 420)
- 10 Hinging from moulding and 110° opening
- 11.12 Flush mounted and recessed fasteners
- 13 BAC 55 & BAC 75 stackable with embossed bottom and lid from moulding.
- 14 BAC 160 & BAC 420 on metal feet and lid fitted with stacking locations
- 15 Integrally moulded handles recessed.
- 17 Drain plug (BAC 160 & BAC 420)

Options


- F.G 2 brake wheels or metal feet
- N Castor base 2 fixed wheels, 2 swivelling wheels
- O Castor base 2 fixed wheels, 2 swivelling wheels with brake
- P Castor base 4 swivelling wheels , 2 with brake

Tel. : +33 014 77 906 863
 Fax : +33 014 77 903 896
OLVO-LOGISTICS.COM



LEADER IN INSULATED CONTAINERS

CLASSIC

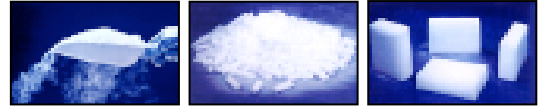

Bac made of fibre glass



Model	BAC 50	BAC 120	BAC 150	BAC 250
Outer dimensions in mm	610 x 4100 x 485	765 x 600 x 614	800 X 640 X 660	980 X 900 X 650 H
Inner dimensions in mm	480 x 280 x 330	610 x 445 x 430	625 x 470 x 480	800 X 720 X 455 H
Useful volume	44 litres	117 litres	141 litres	262 litres
K value W/M2x°C	0,46	0,31	0,31	0,31
Weight in Kg	17 Kg	30 Kg	32 Kg	58 Kg
Weight of Dry Ice	35 Kg	90 Kg	110 Kg	200 Kg



Model	BAC 260	BAC 480	BAC 600
Outer dimensions in mm	996 X 926 X 810	1200 X 1000 X 970	1200 X 1200 X 970
Inner dimensions in mm	800 X 720 X 455	1000 X 800 X 600	1000 X 1000 X 600
Useful volume	262 litres	480 litres	600 litres
K value W/M2x°C	0,31	0,27	0,25
Weight in Kg	73 Kg	112 Kg	122 Kg
Weight of Dry Ice	200 Kg	380 Kg	480 Kg

Tel. : +33 014 77 906 863
 Fax : +33 014 77 903 896
OLIVO-LOGISTICS.COM




LEADER IN INSULATED CONTAINERS

CLASSIC



Model	BAC 50	BAC 120	BAC 150	BAC 250	BAC 260	BAC 480	BAC 600
Options	N.O.P.S.T	N.O.P.Q.R.S.T	N.O.P.Q.R.S.T	N.O.P.Q.S.T	N.O.P.Q.S.T	N.O.P.Q.S.T	N.O.P.Q.S.T

Specifications and optional equipment

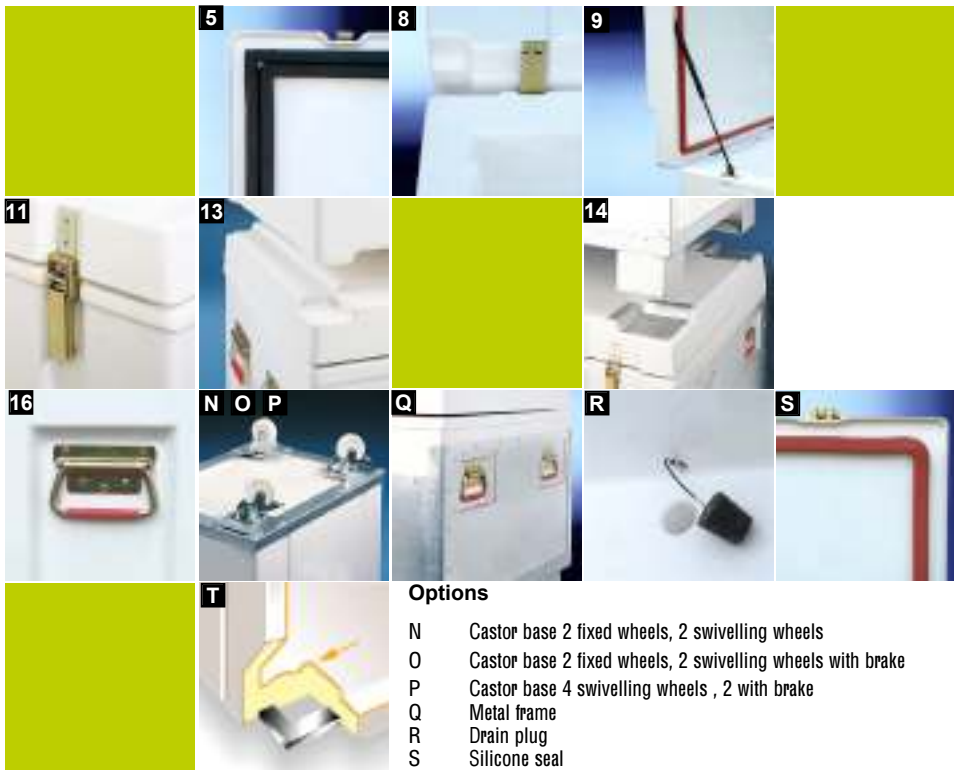

Technical features

- 5 Monobloc seal made of EPDM
- 9 Lid fitted with gas jacks for a 110 ° lid opening (BAC 250, BAC 260, BAC 480 & BAC 600)
- 11 Flush mounted and recessed fasteners
- 13 BAC 50, BAC 120, BAC 150 & BAC 250 stackable with embossed bottom and lid from moulding.
- 14 BAC 260, BAC 480 & BAC 600 on chassis with metal feet and lid fitted with stacking locations
- 16 Flush mounted handles recessed

Options

- N Castor base 2 fixed wheels, 2 swivelling wheels
- O Castor base 2 fixed wheels, 2 swivelling wheels with brake
- P Castor base 4 swivelling wheels, 2 with brake
- Q Metal frame
- R Drain plug
- S Silicone seal
- T Reinforced inner shell

Tel. : +33 (0)4 77 906 863
 Fax : +33 (0)4 77 903 895
OLVO-LOGISTICS.COM



LEADER IN INSULATED CONTAINERS